


DS-K1T6240 Series Face Recognition Access Control Terminal

biosyn



Innovation. Passion. People.

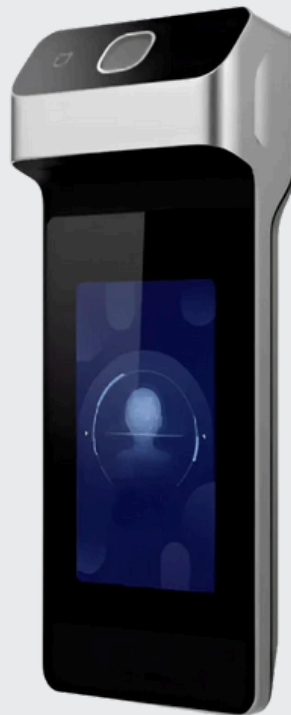

- ◆ 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens
- ◆ Built-in Lithium battery, last for 3.5-5 hours
- ◆ Recognition distance: 0.3 to 3 m
- ◆ Face recognition duration < 0.2 s/User
- ◆ Face recognition accuracy rate $\geq 99\%$
- ◆ Multiple authentication methods, including face, card, QR Code etc.
- ◆ Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6)
- ◆ 4G and WiFi Option for Mobile T&A





Specifications

System	
Operating system:	Linux
Display	
Size	4.3 inch
Type	Touch Screen
Video	
Lens	Dual-lens
Resolution	2 MP
Video standard	PAL (Default) and NTSC
Network	
Wired network	10 M/100 M self-adaptive
4G	Support (only on DS-K1T6240MGB-QR)
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Type-C USB	1
Sim card slot	1 (only 4G version)
Capacity	
Face capacity	10,000
Card capacity	50,000
Event capacity	100,000
Authentication	
Face recognition accuracy rate	≥ 99%
Face recognition duration	< 0.2 s per person
Face recognition distance	0.3 to 3 m
Card type	Mifare 1 card
Card reading distance	0 ~ 3 cm
General	
Power supply	Built-in lithium battery or use 2 A (DC 12 V ~ DC 24 V)
Working environment	Indoor
Installation	Wall mount or hand held

